

Smart Signboard XDS-2370

23-inch Widescreen All-in-One FHD Network Display



The IAdea XDS-2370 smart signboard for digital signage incorporates media playing, a robust design and commercial functionality into an affordable digital signage solution.




Superior Image Quality

The XDS-2370 feature with latest wide viewing technology, customers can see the playing image or video from any angle at both landscape and portrait display.

Extremely Durable with Tempered Glass Surface

Elegant glass surface with robustness design in mind. The XDS-2370 uses anti-scratch, two times stronger tempered glass for commercial application.

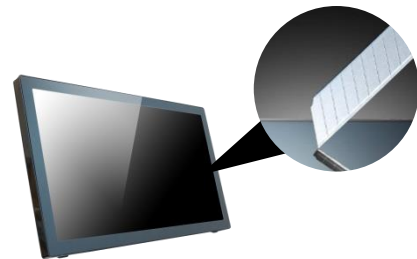

All-in-One Smart Design

No extra cabling, simply connects power and network, then update and control the display remotely at your finger tips

Technical Specification

Display and Sound

- 23" IPS LCD panel
- 250 nits maximum brightness
- 1920x1080 panel resolution
- Viewing angle (H/V): 178/178
- Built-in stereo speakers 2Wx2

Video format supported

- H.264/AVC up to 1080p (1920x1080)
- MPEG-4 up to 1080p (1920x1080)
- MPEG-2 up to 1080p (1920x1080)
- MPEG-1 up to 1080p (1920x1080)
- VC-1 up to 1080p (1920x1080)

Image format supported

- JPEG
- PNG

Audio format supported

- MP3 Audio

Advanced Signage Features

- Remote commissioning
- AlwaysOn, AppLockto prevent unauthorized access
- StrongCache for continued playback even when network is not available
- Multi-zone screen layout, transparent PNG overlay, and graphical scrolling ticker
- Auto-play starts playing scheduled contents automatically when power is re-established
- Automatic error recovery with built-in WDT
- Real-time clock with backup clock battery

Open Standards Supported

- HTML5, JavaScript, and CSS
- Android 4.4 API
- W3C SMIL for cross-platform management
- W3C Widgets for HTML delivery

HTML5 Support

- Widgets for calendar, clock, news, weather, Twitter, and web page integration
- HTML5 technologies including CSS and Javascript
- WebKit-based browser engine, same as Google Chrome™ and Apple Safari® browsers

Content Management

- SignApps Express Utility
- 3rd party solution (optional license)

Connectivity (when use as digital signage player)

- Wi-Fi: 802.11 b/g/n
- Micro USB for ADB
- Gigabit Ethernet
- USB 2.0 x 2
- 3.5mm analog stereo audio out

Connectivity (when use as display)

- HDMI-in
- VGA-in
- 3.5mm analog stereo audio in

Local Storage

- 8 GB eMMC built-in
- Micro SD card slot (card replaces internal storage)

Mounting Options

- Built-in VESA MIS-D 100x100mm mounting points

Supplied Accessories

- Power cable
- Quick guides
- Software CD

Optional Accessories

- Adjustable stable stand



Expansion Options

- 16GB/32GB micro SD/SDHC memory card

Built-in Power Supply

- AC 100-240V, 50-60Hz

Environmental

- Operating temperature: 0 to 40°C
- Humidity: 10 to 85% @ 45°C, non-condensing

Dimensions for Product and Package

- Display Size: 561 mm x 338.4 mm x 57.2 mm (22.09" x 13.32" x 2.25")
- Display Weight: 4.5kg (9.92 lbs)


Certifications

- CE/FCC/RoHS/TELEC/VCCI/PSE

Warranty

- 1-year limited parts & labor

Product Photos

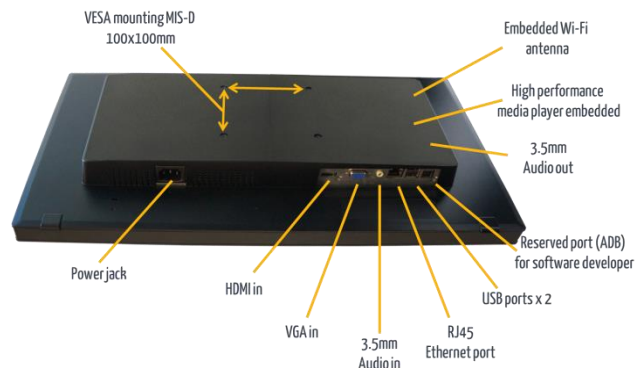

Authorized Reseller



QUANTUM SPHERE
GATEWAY TO EXCELLENCE

Quantum Sphere Pty Ltd

PO Box 6077

Dural, NSW 2158 Australia

P: 1300 571 188

E: sales@qsphere.com.au

F: 02 8569 0655

www.qsphere.com.au

IAdea Corporation (Headquarters)

3F, No. 21, Lane 168

Kingshan Rd., Taipei, Taiwan 114 ROC

Phone: +886-2-2791-1110

Fax: +886-2-2791-1170

Email: Sales@IAdea.com

Website: <http://www.IAdea.com>